


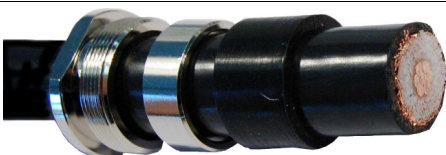





# Mounting instruction



## Ecoflex<sup>®</sup> 10, Aircom<sup>®</sup> Premium

UHF plug PRO / Item no.: 7378

[www.ssb-electronic.com](http://www.ssb-electronic.com)

<p>Required tools:</p> <table><tr><td>1 x</td><td>cutter knife</td></tr><tr><td>1 x</td><td>scissors</td></tr><tr><td>1 x</td><td>open-ended spanner 17 mm</td></tr><tr><td>1 x</td><td>open-ended spanner 18 mm</td></tr><tr><td>1 x</td><td>soldering station + solder</td></tr></table>		1 x	cutter knife	1 x	scissors	1 x	open-ended spanner 17 mm	1 x	open-ended spanner 18 mm	1 x	soldering station + solder
1 x	cutter knife										
1 x	scissors										
1 x	open-ended spanner 17 mm										
1 x	open-ended spanner 18 mm										
1 x	soldering station + solder										
1	 <p>Cut off cable tail right-angled.</p>										
2	 <p>Move the nut, clamping ring and rubber washer over the cable tail.</p>										
3	 <p>Remove 17 mm of the outer jacket with a cutter knife.</p>										
4	 <p>Bend copper braid upwards right-angled. Insert contact sleeve between copper foil and braid until stop. Cut off protruding braid. Move the rubber seal to the front, up to the contact sleeve.</p>										
5	 <p>Mark out and remove the copper foil and the dielectric with a cutter knife.</p>										
6	 <p>The prepared cable tail has to be inserted into the housing until stop. Tighten the clamping nut finger tight with two open-ended spanners 17/18 mm. A gap of 1 to 1,5 mm must still be visible between the nut and the connector housing!</p>										
7	 <p>Carefully solder the inner conductor from the front.</p>										