



WL-5600-1 pro / Item.No.: 9556



The WL5600-1 is a bidirectional amplifier for the WLAN frequency range 5.18GHz to 5.825GHz. It is equipped with an automatic transmission / reception switch. The gain is min. 25dB. A gain of at least 15 dB is ensured in the receiving direction. The output power can be up to 30dBm (1W).

The entire electronics are mounted on a low-loss and high-quality circuit board.

The device is installed in a robust IP65 aluminum case and is especially able for rough environments. A wall holder is included in delivery. So the WL5600-1 pro can easy mounted at walls with screws. The WL5600-1 does not have its own connection for the operating voltage. The voltage supply is only possible via a remote switch, e.g. DCC 2,4 - 5,6 GHz.

Notes on operation:

Please observe the legal regulations regarding maximum transmission power. In Germany you may send an EIRP of 1000 mW in Subband 2 (5470 MHz - 5725 MHz). In subband 1 (5180 MHz - 5320 MHz), however, only 200 mW EIRP is permissible.

The operator is responsible for operating the device within the legal limits of the respective country.

The TRX input should be at least at -10dBm so that the transmitter switching is safe.

Please ensure that the device is not overdriven. As a result, the data rate is drastically reduced since amplitude information would be distorted. To avoid

damage, the maximum level must not be exceeded.

Technical data:

Frequency range:	5180 - 5825 MHz
Receive gain::	Min. 15dB typ. 16dB
Transmit gain:	Min. 25dB typ. 27dB
Output power max.:	30dBm (CW)
Input power Bias-T:	-10dBm, max. 6dBm
Input power Ant:	max. 0dBm
P1dB Output 1dB compression point (TX)	30dBm
EVM:	Max. 3%
Operating voltage:	7 – 14V
Current consumption:	Max. 1,3A
Connection standard:	N - Buchse
Case:	IP65 aluminum
Dimensions:	122mm x 151mm
Supported standards:	IEEE802.11 a/n




WL-5600-1 pro / Item.No.: 9556

Connection plan:

In order to transmit the maximum power to the antenna, it is advisable to position the WL5600-1 as close as possible to it.

The operating voltage is fed via a remote switch with an operating voltage between 12V and 14V.

When planning, please take into account the maximum output power of your network device.

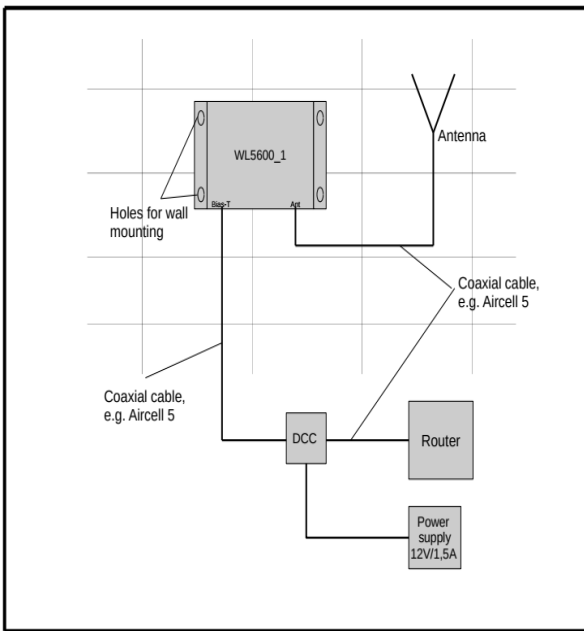

Declaration of Conformity



The CE mark is a free trade mark. It does not guarantee any product features. The product does apply all relevant regulations within the scope of 94/62/EG.

Manufacturer is: SSB-Electronic GmbH,
Am Pulverhäuschen 4, 59557 Lippstadt/Germany

Technical changes are reserved. Contents of this document are the intellectual property of SSB-Electronic GmbH. Reproduction is only permitted with the express written approval.

How to contact:

E-Mail: support@ssb-electronic.com
 Phone: +49 (0) 2941-93385-0
 Internet: www.ssb.com

Notes on environmental protection



Electrical and electronic devices may not be disposed of with household waste. This must be handed in separately at collecting points, or returned to the point of sale. Packaging materials must be separated and disposed of through the municipal waste by material type.

Maintenance

Do not open the unit. It does not contain any parts needing maintenance. If you need help regarding technical matters, please contact support@ssb-electronic.com. For a lowest possible noise figure of the complete system, set preamp to maximum gain.

Safety, Warranty

Not suitable for children! The packaging material and the device may contain small parts which may be swallowed. Repairs may only be performed by qualified personnel., Opening the device, or improper use will void any warranty claims. No guarantee will be given. The device applies to the Low Voltage Directive 2006/95/EG, as well as to 2004/108/EG, 2002/96/EG, 1999/44/ EG.