
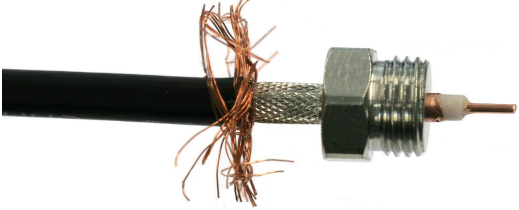



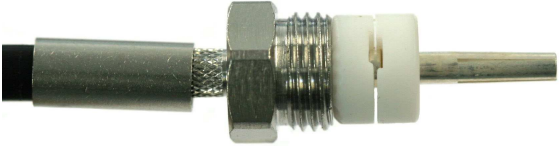
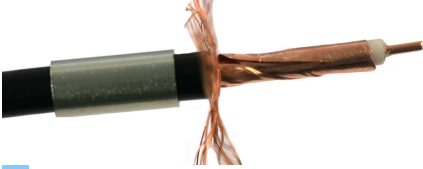



Mounting instruction



AIRCELL®5

N-one-hole-socket, screw/solder / Art. Nr. 7707

 <p>1. Cut off cable tail right-angled. Slide the crimp sleeve over the cable head.</p>	 <p>5. Insert the so prepared cable end into the connector housing as far as it will go (Click).</p>
 <p>2. Remove 21mm of the outer sheath with a knife.</p>	 <p>6. Cut the excess braid and move the rubber seal forward up to the contact ferrule. Put the first plastic ring over the inner conductor. Put the inner pin onto the inner conductor and solder it through the hole.</p>
 <p>3. High bend the copper mesh at right angles.</p>	 <p>7. Place the second plastic ring over the inner pin.</p>
 <p>4. Remove 5mm of the the copper foil and 3mm of the foamed dielectric with a knife.</p>	 <p>8. Crimp the crimp jacket with a crimp tool; herewith the copper braid will be trapped between the crimp jacket and the connector housing. Screw the one-hole-socket onto the socket contact.</p>