


DATA SHEET/Datenblatt

TNC – Con. crimp


item.-no. 7374

TNC- Vollcrimpstecker

Art. Nr. 7374

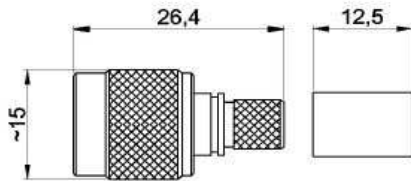

All dimensions in mm - Alle Dimensionen in mm



Description

TNC – Con. crimp

Beschreibung

TNC - Vollcrimpstecker

Mechanical characteristics

Cables

Mechanische Eigenschaften

Kabel

Aircell 7

Inner conductor

Innenleiter

to crimp / zu crimpen

Outer conductor

Außenleiter

to crimp / zu crimpen

Coupling torque

Kupplugsdrehmoment

4-6 Nm

Components

Inner contacts

Bauteile

Innenkontakt

CuSn C51900 (Phosphorbronze)

Body and other metal parts

Körper und andere Metall Teile

CuZn39Pb3 nickel plated

Insulator

Isolierung

TEFLON® (PTFE)

Gasket

Dichtung

silicone rubber

Electrical characteristics

Impedance

Elektrische Eigenschaften

Wellenwiderstand

50Ω

Operating voltage

Betriebsspannung

≤ 1 kV RMS

Insertion loss

Einfüge Dämpfung

≤ 0,05 dB

Environmental

RoHS compliant

Umgebung

RoHS konform

2002/95/EC

protection class

Schutzklasse

IP (IEC 60529)

operating temperature

Betriebstemperatur

-45°C/+155°C