


BNC-Stecker / BNC-Plug

Artikel Nr. / Part-no.: 7375

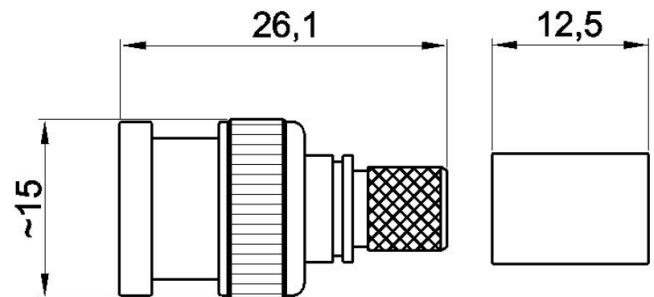

Alle Angaben in mm / All dimensions are in mm
 Crimp Pin/ Solder hole: \varnothing 1,9 mm - \varnothing 1,2mm
 Crimp Hülse / Crimp ferrule : \varnothing 9,3 x 0,75 mm

Norm: IEC 169-8

Kabeltypen / Cable Types: Aircell 7 / H 2007 / Highflexx 7

Mechanische Eigenschaften / Mechanical specifications:

Isolierhülse / Isolator	PTFE
Anpressdichtung / Gasket	Gummi / Rubber
O-Ring / O-ring	-
Dichtung Steckergesicht / Gasket in mating face	Silikon / Silicone
Oberfläche / Surface	vernickelt / nickel plated
Metallteile außer Pin / Metal parts excl. pin	CuSnZn3
Pin (diamagnetisch) / Pin (diamagnetic)	CuSn6; QSn6.5-01 (C51900) or CuZn39Pb3
Temperaturbereich / Operating temperature	-45°C / +155°C
Gewicht / Weight	11g
RoHs conform / RoHs compliant	Ja / Yes
Schutzklasse / Protection class	IP 65

Elektrische Eigenschaften / Electrical specifications:

Betriebsspannung / Working voltage	\leq 1 kV RMS
Impedanz / Impedance	50 Ω
Isolationswiderstand / Isulation resistance	\geq 5 G Ω
Frequenz bis zu / Frequency up to	4 GHz
Durchgangswiderstand innen / Inner contact resistance	\leq 1,5 m Ω
Durchgangswiderstand außen / Outer contact resistance	\leq 1,0 m Ω