


SMA-Stecker / SMA-Plug
Artikel Nr. / Part-no.: 7385

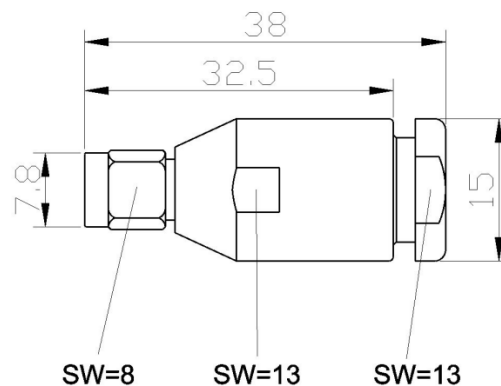

Alle Angaben in mm / All dimensions are in mm
 Pin: Loch / hole: \varnothing 2 mm

Norm: IEC 60 169-15

Kabeltypen / Cable Types: Aircell 7 / H2007 / highflexx 7 / LMR 300

Mechanische Eigenschaften / Mechanical specifications:

| | |
|---|----------------------------|
| Isolierhülse / Isolator | PTFE |
| Anpressdichtung / Gasket | Gummi / Rubber |
| O-Ring / O-ring | Gummi / Rubber |
| Dichtung Steckergesicht / Gasket in mating face | Silikon / Silicone |
| Oberfläche / Surface | vernickelt / nickel plated |
| Metallteile außer Pin / Metal parts excl. pin | CuZn39Pb3 |
| Pin (diamagnetisch) / Pin (diamagnetic) | vergoldet / gold plated |
| Temperaturbereich / Operating temperature | -55°C / +155°C |
| Gewicht / Weight | 34g |
| RoHs conform / RoHs compliant | Ja / Yes |
| Schutzklasse / Protection class | IP 67 |

Elektrische Eigenschaften / Electrical specifications:

| | |
|---|-----------------------|
| Betriebsspannung / Working voltage | \leq 1000 V RMS |
| Impedanz / Impedance | 50 Ω |
| Isolationswiderstand / Isulation resistance | \geq 5 G Ω |
| Frequenz bis zu / Frequency up to | 1 GHz |
| Durchgangswiderstand innen / Inner contact resistance | \leq 1,5 m Ω |
| Durchgangswiderstand außen / Outer contact resistance | \leq 1,0 m Ω |