


UHF-Buchse / UHF Connector female

Ecoflex 5 (crimp)

Artikel-Nr. / Item no.: 7763-E

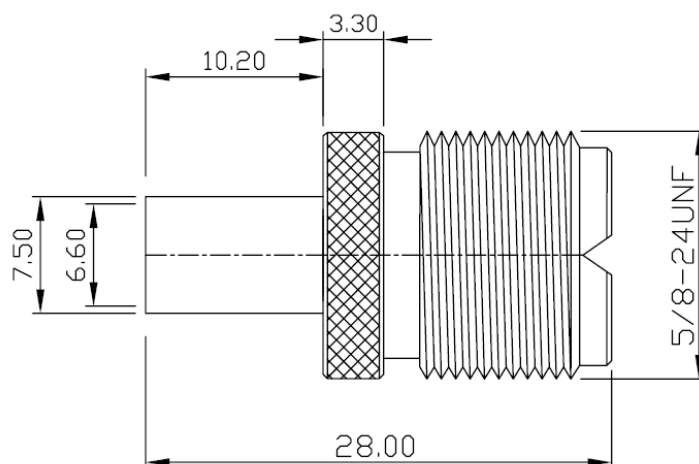

Kabeltypen / Cable Types: Ecoflex 5 / H155

Mechanische Eigenschaften / Mechanical specifications:

Steckergehäuse / Body	Messing / Brass
Pin	Messing vergoldet / Brass gold plated
Dielektrikum / Dielectric	Delrin Acetalharz / Delrin Acetal Resin
Temperaturbereich / Temperature range	-30°C ... +80°C
Gewicht / Weight	14,1 g
RoHS konform / RoHS compliant	ja / yes

Elektrische Eigenschaften / Electrical specifications:

Betriebsspannung / Working voltage	≤ 1500 V RMS
Impedanz / Impedance	50 Ω
Isolationswiderstand / Insulation resistance	≥ 5 G Ω
Frequenz bis / Frequency up to	200 MHz
Einfügedämpfung / Insertion loss	$\leq 0,05$ dB
Rückflussdämpfung / Return loss	$\leq -31,5$ dB @ 0,2 GHz
Durchgangswiderstand innen / Inner contact resistance	≤ 3 m Ω
Durchgangswiderstand außen / Outer contact resistance	≤ 2 m Ω