

Mounting instruction



AIRCELL®5

N-Connector, srewable / item. No.: 7700




Cut off cable tail right-angled.



Move the nut, clamping ring and rubber washer over the cable head.



Remove 8 mm of the outer sheathing with a knife.

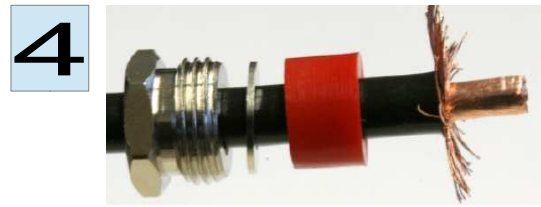

Bend copper braid upwards right-angled.



Cut the copper braid with a side cutter. Slit slightly a length of 6 mm of the copper foil and remove it, then remove 5 mm of the dielectric.



Move the rubber washer upfront to the contact jacket, so the rest of the copper braid is clamped between the rubber washer and the contact jacket.



Attach the inner pin to the tip and solder through the hole. There should be a space of 1 mm between the inner pin and the copper foil.



Insert the prepared cable end into the connector housing as far as it will go (Click). Take two open-end wrenches 11 mm to tighten the clamping nut hand-tight.