



Single Multi block hanger support systems are designed for organizing bundled runs of coax cable.

Each space-saving block securely holds one run of coax, allowing a compact bundle of up to 3x runs to be supported by stacking three blocks.

**FEATURES / BENEFITS**

- Single Multi Blocks are manufactured of polypropylene providing thermal, chemical and UV resistance in all environments.
- They come including angle member adapter and necessary hardware.
- The angle member adapter fastens the clamp to the tower without drilling.
- The angle member adapter includes a tower member set screw.
- The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member.
- Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.



picture shows MBHS78-1-F for illustration purpose

**Technical features**

**GENERAL SPECIFICATIONS**

<b>Product Line</b>		Coaxial Cable Accessories Hybrid Cable Accessories
<b>Product Type</b>		Hanger
<b>Hanger Type</b>		Single Multi-block
<b>Transmission Line Type</b>		LCF12 HCA12-50 HB012
<b>Cable Type</b>		Coaxial Foam Dielectric Hybrid
<b>Color</b>		Black

**MECHANICAL SPECIFICATIONS**

<b>Cable Size</b>		1/2
<b>Number of Cable / Waveguide Runs</b>		1 per layer, 1 layer, 1 run
<b>Configuration</b>		incl. Angle member adapter
<b>Angle member adapter clamping range mm (in)</b>		4 / 24 (0.157 / 0.945 )
<b>Angle member adppter threads</b>		2x M8
<b>Material</b>		Metal part: Stainless steel Plastic parts: Polypropylene
<b>Length</b>	mm (in)	130 (5.12) see picture below (L)
<b>Height</b>	mm (in)	50 (1.96) see picture below (H)
<b>Width</b>	mm (in)	50 (1.96) see picture below (W)
<b>Recommended / Maximum Clamp Spacing</b>	m (ft)	0.6 / 1 (2 / 3.25)


**TEMPERATURE SPECIFICATIONS**

<b>Operation Temperature</b>	°C (°F)	-50 to 85 (-58 to 185 )
<b>Storage Temperature</b>	°C (°F)	-50 to 85 (-58 to 185 )



**PACKAGING INFORMATION**

Package Quantity		10
Weight per piece	kg (lb)	0.148 (0.32)
Weight per kit	kg (lb)	1.7 (3.75)

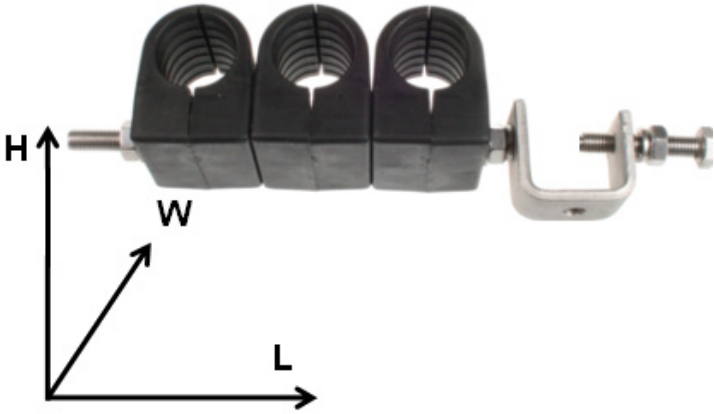

picture shows MBHS78-3-F for illustration purpose

**External Document Links**

[Installation Instruction](#)

**Notes**



Single Multi block hanger support systems are designed for organizing bundled runs of coax cable.

Each space-saving block securely holds one run of coax, allowing a compact bundle of up to 3x runs to be supported by stacking three blocks.

**FEATURES / BENEFITS**

- Single Multi Blocks are manufactured of polypropylene providing thermal, chemical and UV resistance in all environments.
- They come including angle member adapter and necessary hardware.
- The angle member adapter fastens the clamp to the tower without drilling.
- The angle member adapter includes a tower member set screw.
- The hanger mounting rod may be located in either of two mounting holes, depending on orientation of the fixing member.
- Compliant to RoHS (EU 2002/95/EC) and CRoHS (China SJ/T11363-2006) i.e. usable on a global basis.



MBHS78-1-F

**Technical features**

**GENERAL SPECIFICATIONS**

<b>Product Line</b>		Coaxial Cable Accessories Hybrid Cable Accessories
<b>Product Type</b>		Hanger
<b>Hanger Type</b>		Single Multi-block
<b>Transmission Line Type</b>		UCF78 LCF78 HB078
<b>Cable Type</b>		Coaxial Foam Dielectric Hybrid
<b>Color</b>		Black

**MECHANICAL SPECIFICATIONS**

<b>Cable Size</b>		7/8
<b>Number of Cable / Waveguide Runs</b>		1 per layer, 1 layer, 1 run
<b>Configuration</b>		incl. Angle member adapter
<b>Angle member adapter clamping range mm (in)</b>		4 / 24 (0.157 / 0.945 )
<b>Angle member adppter threads</b>		2x M8
<b>Material</b>		Metal part: Stainless steel Plastic parts: Polypropylene
<b>Length</b>	mm (in)	150 (5.90) see picture below (L)
<b>Height</b>	mm (in)	70 (2.73) see picture below (H)
<b>Width</b>	mm (in)	50 (1.96) see picture below (W)
<b>Recommended / Maximum Clamp Spacing</b>	m (ft)	0.8 / 1 (2.75 / 3.25)


**TEMPERATURE SPECIFICATIONS**

<b>Operation Temperature</b>	°C (°F)	-50 to 85 (-58 to 185 )
<b>Storage Temperature</b>	°C (°F)	-50 to 85 (-58 to 185 )



**PACKAGING INFORMATION**

Package Quantity		10
Weight per piece	kg (lb)	0.178 (0.39)
Weight per kit	kg (lb)	2 (4.41)

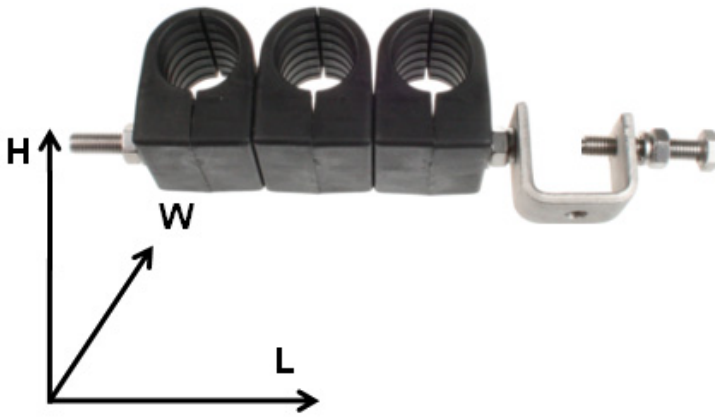

picture shows MBHS78-3-F for illustration purpose

**External Document Links**

[Installation Instruction](#)

**Notes**